

## Product Specifications and Ratings

### Polymer Properties


- Minimum Operating Temperature: -35°C
- RTI of 120°C per UL 746B
- Non-Flame Propagating
- All components are UV resistant
- UL Listed polymer used on solar panel junction boxes and connectors
- F1 Rated per UL746C, Suitable for UV Exposure and Water Immersion
- Designed and Tested to Meet UL Standard 1565

### Wire Size Capacity

- Round PV Wire: 5 - 7 mm
- Oval Trunk Cable: 9.5 mm X 6.5 mm

### Module Frame Compatibility

- Flange Depth: 20 -10 mm
- Flange Thickness: 2.2 -1.2 mm
- Overall Frame Depth: 35 -20 mm

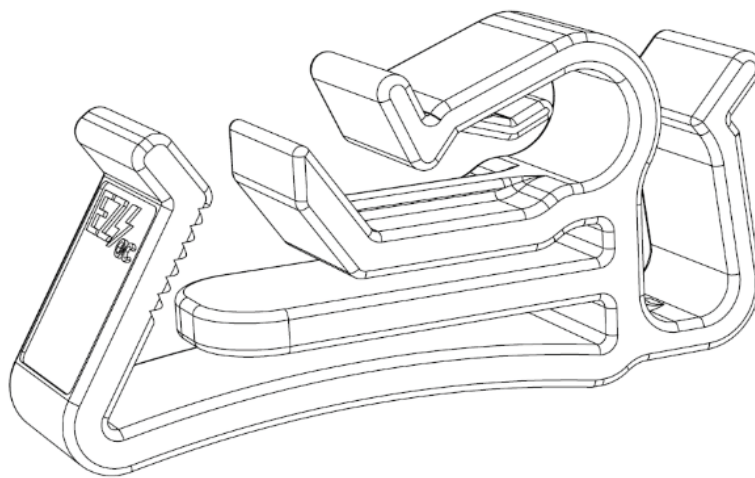

Learn more about  
**OneClip:**

