

Product Specifications and Ratings

Assembly

- Loop Load Capacity: 40 LBS
- Minimum Operating Temperature: -35°C
- Maximum Operating Temperature: 75°C
- Non-Flame Propagating
- All components are UV and corrosion resistant

Cable


- Outer Diameter: 1.5mm
- Construction: 7x7 stranded 300 series stainless steel
- Coating: UV stabilized polymer

LocBody

- UL Listed polymer used on solar panel junction boxes and connectors
- F1 Rated per UL746C, Suitable for UV Exposure and Water Immersion
- RTI of 115°C per UL 746B

Installation Instructions

- Loop cable around components.
- Insert cable through open hole.
- Pull tight to temporarily secure cable.
- Turn cable 180° and insert through final open hole. Pull tight to lock.

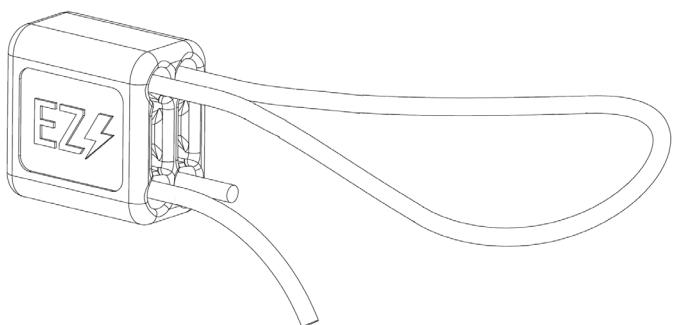

Learn more about
Anaconda:

